


Band	Link	Output Power (dBm)	ERP* (dBm)
1	Downlink	0	3.7
	Uplink	22	28.5
3	Downlink	0	-2.6
	Uplink	22	29.2
5	Downlink	0	-3.5
	Uplink	20	23.5
7	Downlink	0	2.1
	Uplink	22	27.6
8	Downlink	0	4.0
	Uplink	20	24.0
20	Downlink	0	2.3
	Uplink	20	23.5
28L	Downlink	0	3.4
	Uplink	20	20.3
40	Downlink	0	4.8
	Uplink	22	26.9

Model Number	Bands Supported
C41-9B	1,3,7,8,20
C41-JB	1,3,5,7,8,28L,40
C41-KB	3,8,20





*Tested with Donor Antenna (A52-FV3-300)

Ceiling Mounting Instructions (Optional)




REQUIRED HARDWARE

NOTE: This package comes equipped with **Mounting Screws** and **Drywall Anchors** for mounting to the ceiling. Before installing, ensure there are no wires, other objects, or metal plates above the drywall that may interfere with the inserts, screws, or mounted units.

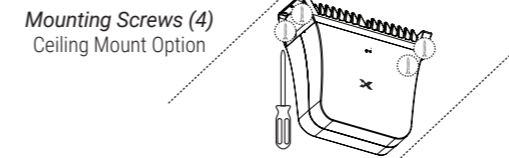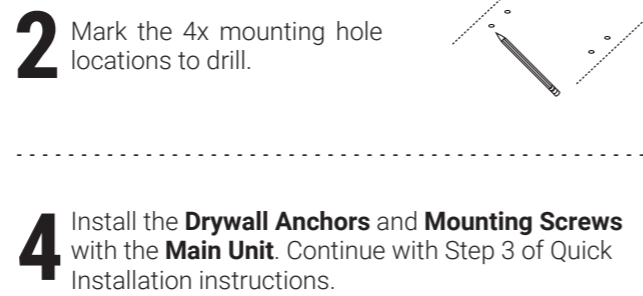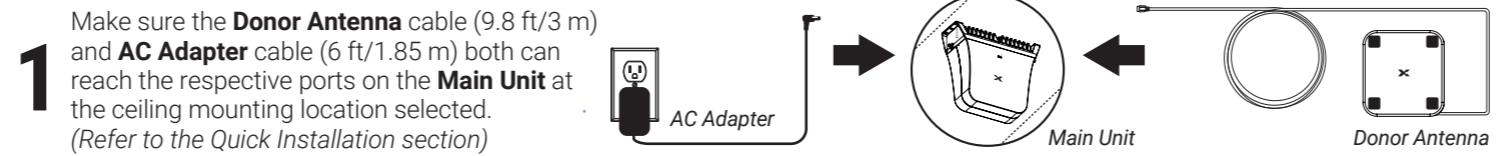


Cel-Fi® CONNECT C41 Quick Start Guide

KIT#: C41-9B-00C
C41-JB-00C
C41-KB-00C

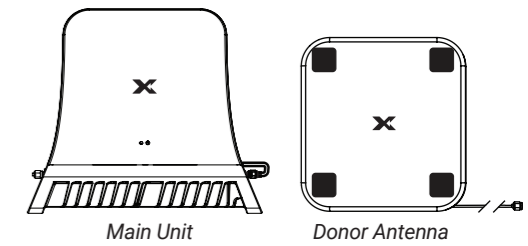

Included In the Box

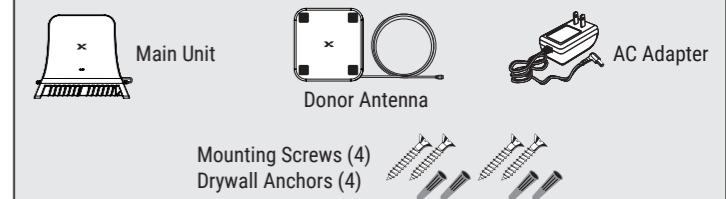

Copyright © 2022 by Nextivity, Inc, U.S. Patents pending. All rights reserved. The Nextivity and Cel-Fi logos are registered trademarks of Nextivity Inc. All other trademarks or registered trademarks listed belong to their respective owners. Designed by Nextivity Inc. in California.

qsg-connect-c41_eng_22-0818


420N007-C41-001-10RB

Band	Link	Output Power (dBm)	ERP* (dBm)
1	Downlink	0	3.7
	Uplink	22	28.5
3	Downlink	0	-2.6
	Uplink	22	29.2
5	Downlink	0	-3.5
	Uplink	20	23.5
7	Downlink	0	2.1
	Uplink	22	27.6
8	Downlink	0	4.0
	Uplink	20	24.0
20	Downlink	0	2.3
	Uplink	20	23.5
28L	Downlink	0	3.4
	Uplink	20	20.3
40	Downlink	0	4.8
	Uplink	22	26.9

Model Number	Bands Supported
C41-9B	1,3,7,8,20
C41-JB	1,3,5,7,8,28L,40
C41-KB	3,8,20





*Tested with Donor Antenna (A52-FV3-300)

Ceiling Mounting Instructions (Optional)




REQUIRED HARDWARE

NOTE: This package comes equipped with **Mounting Screws** and **Drywall Anchors** for mounting to the ceiling. Before installing, ensure there are no wires, other objects, or metal plates above the drywall that may interfere with the inserts, screws, or mounted units.

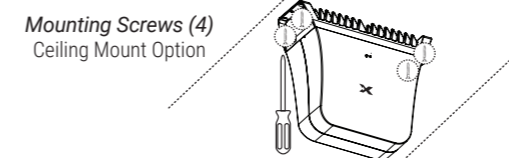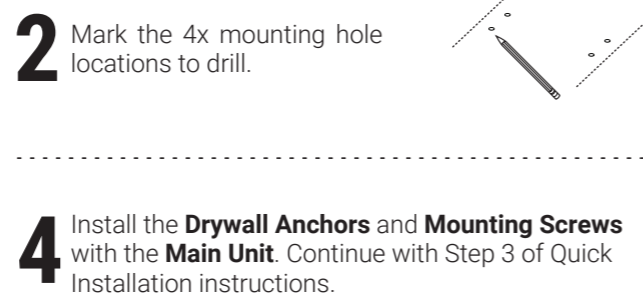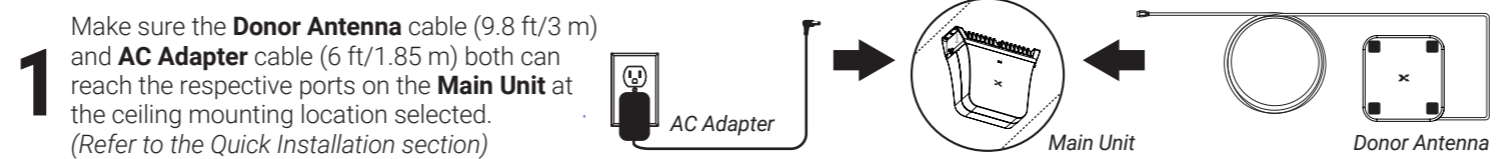


Cel-Fi® CONNECT C41 Quick Start Guide

KIT#: C41-9B-00C
C41-JB-00C
C41-KB-00C

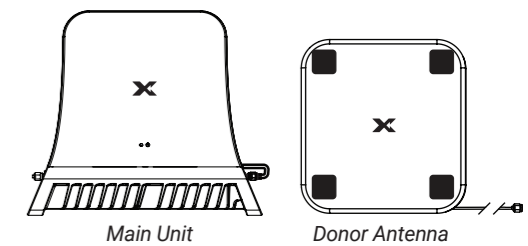

Included In the Box

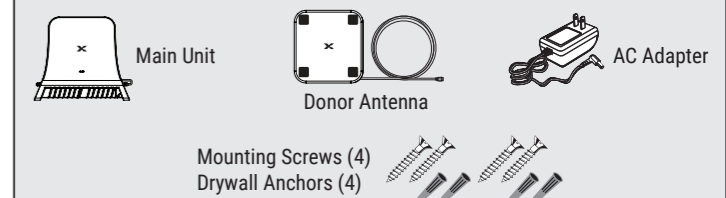

Copyright © 2022 by Nextivity, Inc, U.S. Patents pending. All rights reserved. The Nextivity and Cel-Fi logos are registered trademarks of Nextivity Inc. All other trademarks or registered trademarks listed belong to their respective owners. Designed by Nextivity Inc. in California.


qsg-connect-c41_eng_22-0818

420N007-C41-001-10RB


Quick Installation

IMPORTANT: Your **Cel-Fi CONNECT C41** is an electronic device. It must be kept indoors and in a dry, cool, well-ventilated area.


1 Select Donor Antenna Location

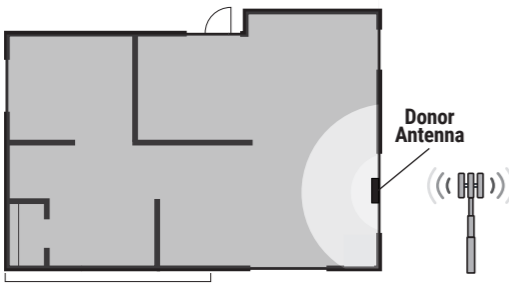


Use your phone to find the window with the best cellular signal. Install the **Donor Antenna** on this window by removing the four adhesive covers and sticking them to the glass.

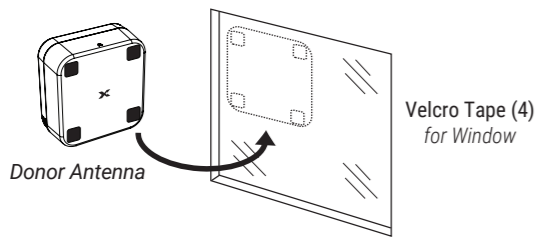


2 Select Main Unit Location

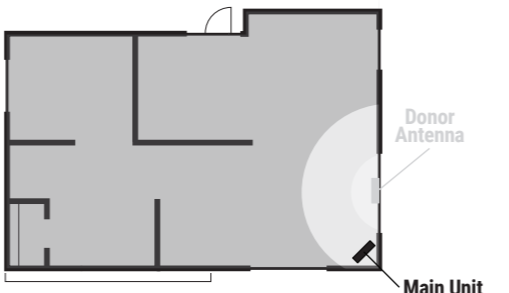

Selecting the ideal location for the **Main Unit** is important to ensure your system provides reliable coverage. The **Main Unit** should be isolated from the **Donor Antenna**, with greater separation providing best performance. Make sure the Nextivity logo on the **Main Unit** faces where coverage is needed and away from the **Donor Antenna**.

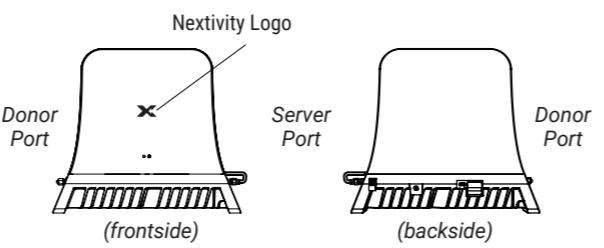


3 Attach Cables

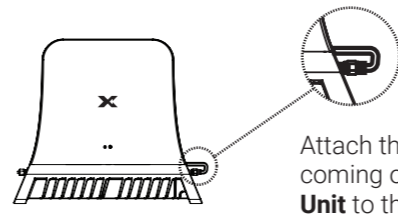



Attach the short cable coming out of the **Main Unit** to the Server Port on the base of the unit.

Attach the cable from the **Donor Antenna** to the Donor Port on **Main Unit**.

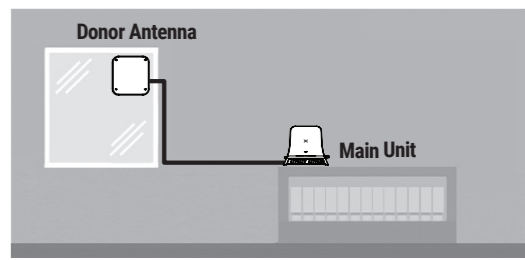

4 Plug In the Main Unit

Plug in the **Main Unit** to power with the included AC adapter. The LED on the front will blink during set up and turn green when the device is ready.

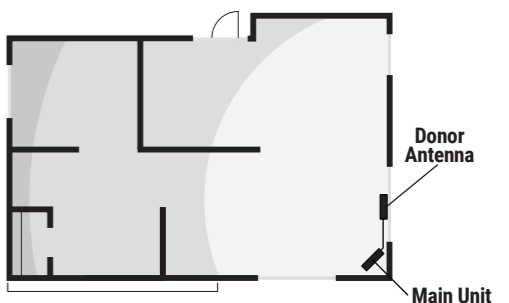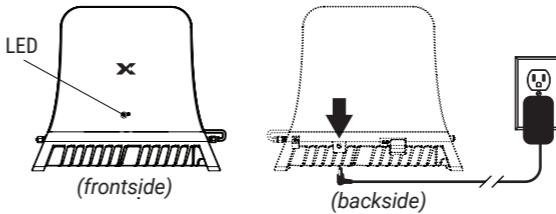

5 Configure with Cel-Fi WAVE App

The **Cel-Fi WAVE App** can be used to review your installed system's performance, including viewing real-time signal strength.




Scan to Download: The Cel-Fi WAVE App is available for smartphones and tablets.




Quick Installation

IMPORTANT: Your **Cel-Fi CONNECT C41** is an electronic device. It must be kept indoors and in a dry, cool, well-ventilated area.


1 Select Donor Antenna Location

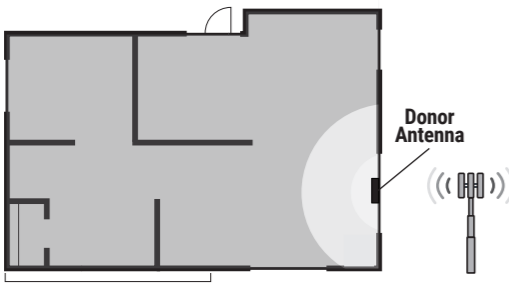


Use your phone to find the window with the best cellular signal. Install the **Donor Antenna** on this window by removing the four adhesive covers and sticking them to the glass.

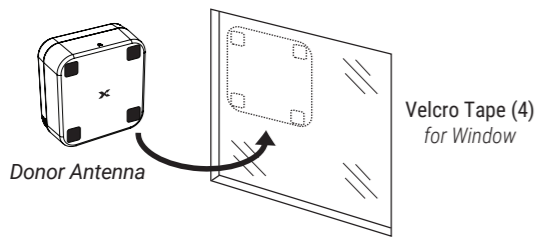


2 Select Main Unit Location

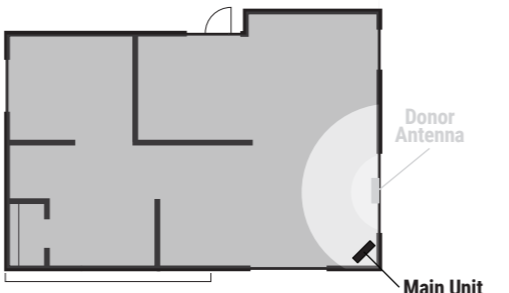

Selecting the ideal location for the **Main Unit** is important to ensure your system provides reliable coverage. The **Main Unit** should be isolated from the **Donor Antenna**, with greater separation providing best performance. Make sure the Nextivity logo on the **Main Unit** faces where coverage is needed and away from the **Donor Antenna**.

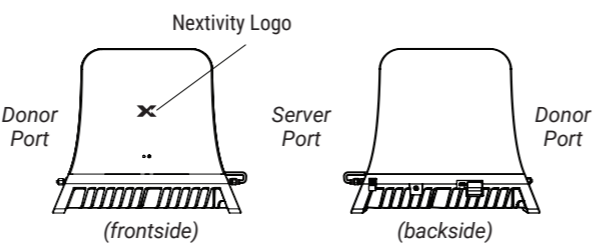


3 Attach Cables

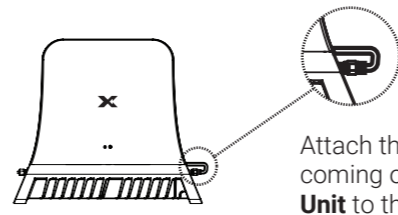



Attach the short cable coming out of the **Main Unit** to the Server Port on the base of the unit.

Attach the cable from the **Donor Antenna** to the Donor Port on **Main Unit**.

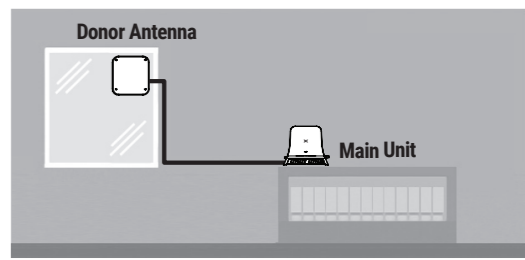

4 Plug In the Main Unit

Plug in the **Main Unit** to power with the included AC adapter. The LED on the front will blink during set up and turn green when the device is ready.

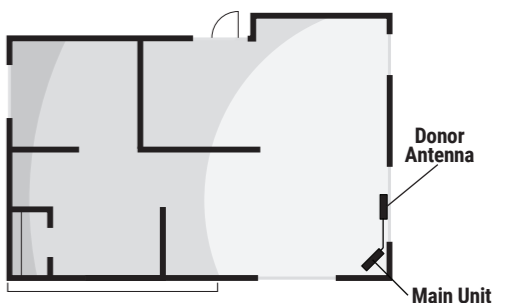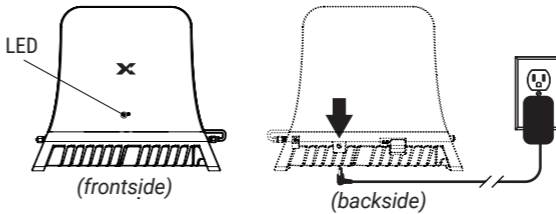

5 Configure with Cel-Fi WAVE App

The **Cel-Fi WAVE App** can be used to review your installed system's performance, including viewing real-time signal strength.



Scan to Download: The Cel-Fi WAVE App is available for smartphones and tablets.

