

- Rugged low profile design
- Covers global cellular / LTE bands 617-960 / 1710-6000 MHz
- Magnetic mount


The Panorama LPBEM-6-60 is a range of low cost high performance magnetic mount antennas for temporary fit applications. At only 95mm (3.7") high and protected by a robust high impact radome the antenna is almost impervious to daily wear and tear.

The LPBEM offers excellent performance across a wide bandwidth. The LPBEM covers global cellular and LTE frequencies from 617-960 MHz and 1710-6000 MHz making it an extremely versatile product. Although intended for magnetic mounting on a conductive ground plane the antenna can also be used for desk mounting applications with some impact on performance.


Supplied with a convenient length of flexible RG174 cable the LPBEM is easy to install and compatible with a large range of modems. Multiple units can be deployed suitably separated for MiMo applications.

Technical Drawing

LPBEM-6-60-2SP shown

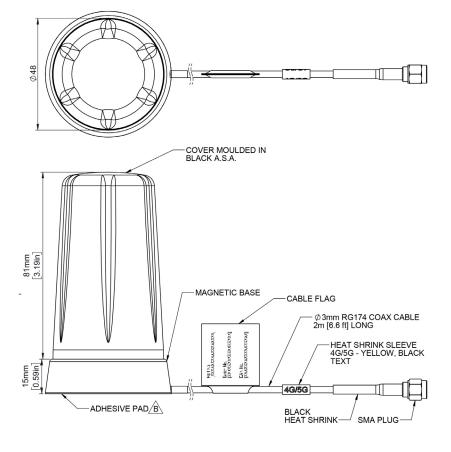

			Product D)ata	
Part No.					
		LPBEM-6-60-2SP	LPBEM-6-60-2SP LPBEM-6-60-5SP		
Electrical Data					
Frequency Range (MHZ)		617-960 / 1710-6000	617-960 / 1710-6000		
Peak Gain (excluding cable loss measured on a ground plane)	617-960 MHz	3dBi			
	1710-2170 MHz	4dBi			
	2170-2700 MHz	5dBi			
	3400-3800 MHz	6dBi			
	4000-6000 MHz	8dBi			
Typical VSWR*		<2.5:1			
Polarisation		Vertical			
Pattern		Omni-directional			
Impedance		50Ω			
fax Input Power (W) 25					
Mechanical Data					
Dimensions (mm)	Height	96 (3.7")			
	Diameter	48 (1.89")			
Operating Temp (°C)		-40°/+	-40°/+80°C (-40°/176°F)		
Material UV stable ASA & Aluminium		ole ASA & Aluminium			
Colour	Black				
Ingress Protection	Equivalent to IPX6				
Mounting Data					
Fixing	Magnetic mount				
Max Speed (KM/h) 160 (100 Mph)					
Cable Data					
·		RG174			
Cable Diameter (mm)			2.8 (0.1")		
Cable Length (m)		2 (6'6")			
Connector SMA (M)					

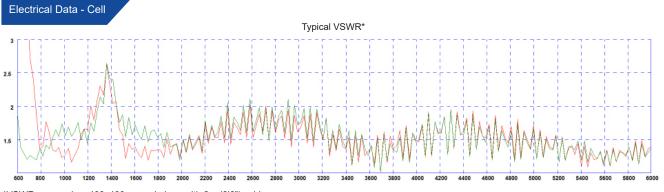

*VSWR mesured on 400x400 ground plane with 2m (6'6") cable.

■ Green Line - Ground Plane

Red Line - Free Space