

# T-2-UW-43-M

---

## Termination Load, 0–6000 MHz



### Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Product Type</b>	Termination Load

### General Specifications

<b>Device Type</b>	Termination Load
<b>Application</b>	Indoor/Outdoor
<b>Color</b>	Black
<b>Inner Contact Plating</b>	Silver
<b>Interface</b>	4.3-10 Male
<b>Outer Contact Plating</b>	Trimetal

### Dimensions


<b>Length</b>	38 mm   1.496 in
<b>Diameter, maximum</b>	20 mm   0.787 in

### Electrical Specifications

<b>Average Power at Temperature</b>	1.7 W @ 60 °C
<b>Average Power, maximum</b>	2 W
<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	0 – 6000 MHz
<b>VSWR</b>	1.15

### Derating Curve

# T-2-UW-43-M

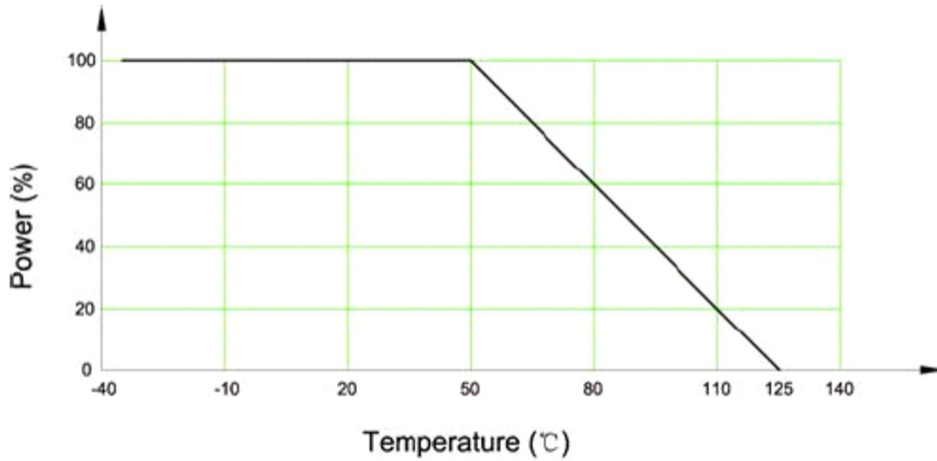

## Environmental Specifications

<b>Operating Temperature</b>	-35 °C to +50 °C (-31 °F to +122 °F)
<b>Relative Humidity</b>	Up to 100%
<b>Ingress Protection Test Method</b>	IEC 60529:2001, IP65

## Packaging and Weights

<b>Height, packed</b>	68 mm   2.677 in
<b>Width, packed</b>	53 mm   2.087 in
<b>Length, packed</b>	580 mm   22.835 in
<b>Weight, gross</b>	0.08 kg   0.176 lb
<b>Weight, net</b>	0.06 kg   0.132 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted

