


■ Outline Dimension Drawing

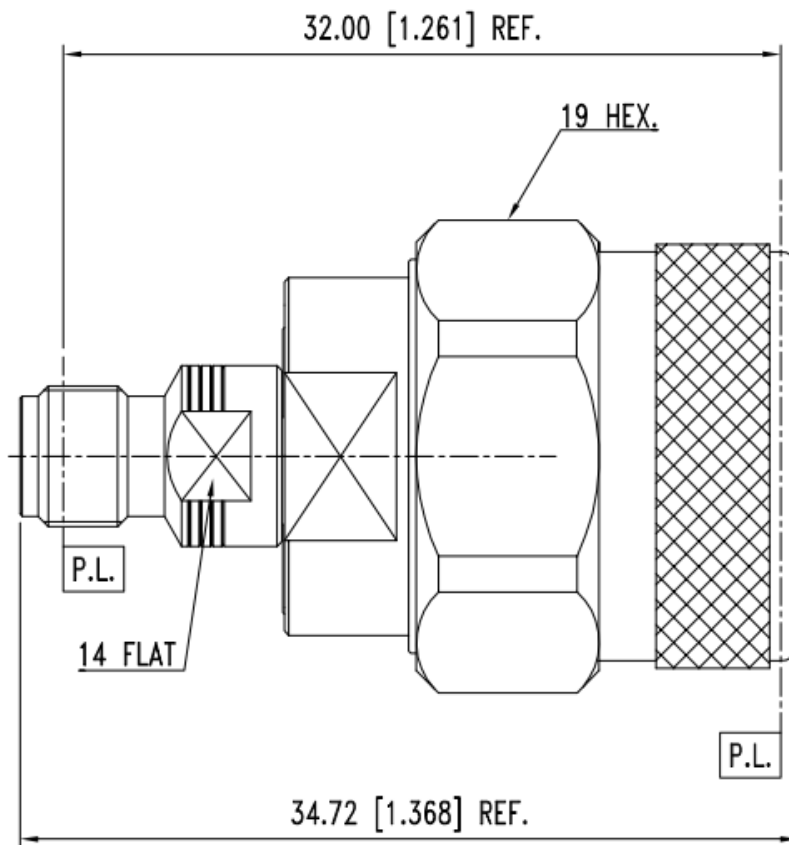

■ Material Specification

Description	Material	Plating
Body	SUS303	Passivated
Contact	BeCu	Gold (30 microinches)
Dielectric	High Performance	N/A
	Application Material	
Coupling Nut	SUS303	Passivated

**■ Electrical Specification**

Description			Description		
Impedance	50	Ω	Insulation Resistance	5000	MΩ Min.
Frequency	18	GHz Max.	Inner Contact Resistance	N/A	mΩ Max.
VSWR	1.2	Max.	Outer Contact Resistance	N/A	mΩ Max.
Insertion Loss	N/A	dB			
Voltage Rating	N/A	Vrms Max.			
Dielectric Withstanding Voltage	750	Vrms Max.			

**■ Mechanical Specification**

Description			Description		
Center Contact			Recommended Torque	in.lbs(K)/ 6 in. lbs	
Axial Force-Mating End	6.0	lbs.			
Axial Force-Opposite End	6.0	lbs.			
Connector Durability	500	cycles			
Weight	33.1	g			

**■ Environmental Specification**

Description		
Temperature Min.	-40	°C
Temperature Max.	105	°C
Hermetic Seal	N/A	